



Eureka[®]

Woodheating



**Designed for living,
made for life.**

MANUFACTURED &
DESIGNED IN AUSTRALIA



Iconic woodheaters for a contemporary world

Immerse yourself in the dynamic range of Eureka woodheaters. Proudly crafted over four generations in country Victoria.

Freestanding Woodheaters

Discovery Series	4
Radiant Series	7
Selection Series	12

Insert Woodheaters

Discovery Series	14
Selection Series	16

Double Sided Range

Double Sided Range	20
Zero Clearance Installation	22
Elevated Insert Installations	22
Specifications	23



MANUFACTURED &
DESIGNED IN AUSTRALIA



Quality Guarantee

All of our heaters are built to last.
That's why we guarantee all of
our fireboxes to last 10 years.

Freestanding Discovery Series

With clever design features and Eureka’s pre-heated primary air technology, the freestanding Discovery Series is certain to impress. Loading firewood has never been easier, with the flat-window models encompassing a tall ergonomic pedestal. Should you simply wish to be absorbed by the flickering flames, the elegant bay window models will provide a stunning view.



- ⊕ 3-Speed fan
- ⊕ Firebrick lined
- ⊕ 8mm steel baffle plate
- ⊕ Dual pre-heated primary air
- ⊕ Cool-touch casing
- ⊕ 10 Year firebox warranty

Emerald 220

		
Capacity 220m ²	Log Width 565mm	Flue Size 150mm
Efficiency 73%†	Emissions 1.0g/kg	Output 15kW‡

Onyx 300

		
Capacity 300m ²	Log Width 630mm	Flue Size 150mm
Efficiency 65%†	Emissions 1.3g/kg	Output 17kW‡

Solitaire 350

		
Capacity 350m ²	Log Width 630mm	Flue Size 175mm
Efficiency 66%†	Emissions 0.9g/kg	Output 20kW‡



- ⊕ 3-Speed fan
- ⊕ Firebrick lined
- ⊕ 8mm steel baffle plate
- ⊕ Tall pedestal for easy loading
- ⊕ 10 Year firebox warranty

Opal 180

Capacity 180m ²	Log Width 490mm	Flue Size 150mm
Efficiency 69%†	Emissions 0.9g/kg	Output 14kW‡

Miner 260

Capacity 260m ²	Log Width 545mm	Flue Size 150mm
Efficiency 72%†	Emissions 1.4g/kg	Output 21kW‡

Garnet 320

Capacity 320m ²	Log Width 620mm	Flue Size 175mm
Efficiency 65%†	Emissions 1.3g/kg	Output 24kW‡

Freestanding Woodheaters



Freestanding Radiant Series

Sure to become a design icon — the sleek and modern Eureka Radiant series provides all the benefits of radiant style wood heating. Perfect for homes with poor insulation or high ceilings, radiant heaters emit heat directly through the outer surface of the firebox, rapidly warming your space.



*Pictured above without
standard rear heat shield

- ⊕ Firebrick lined
- ⊕ Dual baffle system featuring 8mm primary baffle
- ⊕ "Boost Air" inlet for easier ignition
- ⊕ Heavy duty cast iron door
- ⊕ 10 Year firebox warranty

**Jade
160**

Capacity 160m ²	Log Width 480mm	Flue Size 150mm
Efficiency 70%†	Emissions 1.3g/kg	Output 9kW‡

**Amber
240**

Capacity 240m ²	Log Width 535mm	Flue Size 150mm
Efficiency 68%†	Emissions 0.9g/kg	Output 12kW‡

**Jasper
320**

Capacity 320m ²	Log Width 570mm	Flue Size 150mm
Efficiency 66%†	Emissions 1.0g/kg	Output 14kW‡



**Step into the
warmth of a Eureka**



Timeless functionality... enduring elegance



Nugget

The Eureka Nugget is known all around Australia for its functionality and hardworking nature. This tough as nails radiant style unit has an exceptionally deep firebox, allowing you to fit logs that similar sized units would be envious of. The Nugget also incorporates a radiant cook top for your pots and pans, as well as a raised shelf for simmering. The Eureka Nugget truly is a tireless contributor to any Aussie home.

- ⊕ Boil & simmer on top or back shelf
- ⊕ Firebrick lined
- ⊕ Extra deep firebox for easy loading
- ⊕ 10 Year firebox warranty
- ⊕ Tall pedestal for easy loading

		
Capacity 180m ²	Log Width 485mm	Flue Size 150mm
Efficiency 69%†	Emissions 1.1g/kg	Output 16kW‡



Freestanding Selection Series

Why compromise between classic and modern style! The Selection Series range is perfect for those looking to invest in a striking centre piece for their home, guaranteeing dependable heat for many winters to come.





- ⊕ Sleek & modern design
- ⊕ 3-Speed fan with thermostatic switch
- ⊕ Cast iron lined
- ⊕ 8mm steel baffle plate
- ⊕ 10 Year firebox warranty
- ⊕ Dual pre-heated primary air
- ⊕ Dual-action handle latch

Pearl Freestanding 260



Capacity
260m²



Log Width
540mm



Flue Size
150mm

Efficiency
80%†

Emissions
0.9g/kg

Output
16kW‡



Capacity
330m²



Log Width
595mm



Flue Size
150mm

Efficiency
76%†

Emissions
1.3g/kg

Output
17kW‡

Ruby Freestanding 330



- ⊕ Sleek & modern design
- ⊕ 1200mm bench option
- ⊕ 3-Speed fan with thermostatic switch
- ⊕ Cast iron lined
- ⊕ 8mm steel baffle plate
- ⊕ 10 Year firebox warranty
- ⊕ Dual pre-heated primary air
- ⊕ Dual-action handle latch

Pearl Modular 260



Capacity
260m²



Log Width
540mm



Flue Size
150mm

Efficiency
80%†

Emissions
0.9g/kg

Output
16kW‡



Capacity
330m²



Log Width
595mm



Flue Size
150mm

Efficiency
76%†

Emissions
1.3g/kg

Output
17kW‡

Ruby Modular 330

Insert Discovery Series

Turn a draughty open fireplace into a highly efficient heat source! Designed with functionality, efficiency and durability in mind, the Discovery series inbuilt range will keep you warm through the coldest, darkest winters.





Opal 160

- ⊕ 3-Speed fan
- ⊕ Firebrick lined
- ⊕ 8mm steel baffle plate
- ⊕ 10 Year firebox warranty
- ⊕ Zero clearance compatible

Capacity 160m ²	Log Width 490mm	Flue Size 150mm
Efficiency 72%†	Emissions 0.9g/kg	Output 14kW‡

Stockade 240

Capacity 240m ²	Log Width 545mm	Flue Size 150mm
Efficiency 67%†	Emissions 1.5g/kg	Output 17kW‡

Garnet 280

Capacity 280m ²	Log Width 620mm	Flue Size 175mm
Efficiency 65%†	Emissions 1.4g/kg	Output 21kW‡

Victorian 260



- ⊕ 3-Speed fan
- ⊕ Cast iron lined
- ⊕ 8mm steel baffle plate
- ⊕ 10 Year firebox warranty
- ⊕ Cast alloy fascia option (pictured, left)
- ⊕ Zero clearance compatible

Capacity 260m ²	Log Width 570mm	Flue Size 150mm
Efficiency 64%†	Emissions 1.0g/kg	Output 15kW‡



Insert Selection Series

The apex of Australian wood heating! This visually striking series offers the very best of Eureka design, functionality and endeavour. Their narrow fascia's allow the heater to sit neatly within your wall or fireplace. Take comfort as the warmth is generously distributed throughout your home.



- ⊕ Sleek & modern design
- ⊕ 3-Speed fan with thermostatic switch
- ⊕ Cast iron lined
- ⊕ 8mm steel baffle plate
- ⊕ 10 Year firebox warranty
- ⊕ Dual pre-heated primary air
- ⊕ Dual-action handle latch
- ⊕ Zero Clearance Option features "flush-fit fascia (3mm)"



Pearl 240

Capacity 240m ²	Log Width 540mm	Flue Size 150mm
Efficiency 74%†	Emissions 1.0g/kg	Output 12kW‡

Ruby 300

Capacity 300m ²	Log Width 595mm	Flue Size 150mm
Efficiency 68%†	Emissions 1.4g/kg	Output 15kW‡



The perfect work-life balance





Double Sided Range

These heaters truly provide a heart for any home. Whether you’re looking for a powerful heating source, a luxurious centrepiece, or the flamed vitality of a wood burning heater — this range gives incredible flexibility and warmth in multiple rooms (capable of heating up to 420m²).

For further double sided range installation options, such as dual room functionality, speak to your local dealer, or download the Double Sided Reference guide at www.eurekaheating.com.au



Jewel 420 (Freestanding)

- ⊕ 2x 3-speed fans with thermostatic switch
- ⊕ Cast iron lined
- ⊕ 8mm steel baffle plate
- ⊕ 10 Year firebox warranty
- ⊕ Dual-action handle latch
- ⊕ Dual pre-heated primary air
- ⊕ Through-wall options available

		
Capacity 420m²	Log Width 530mm	Flue Size 175mm
Efficiency 62%†	Emissions 1.2g/kg	Output 25+kW‡



Jewel 420 (Modular)

- ⊕ 2x 3-speed fans with thermostatic switch
- ⊕ Cast iron lined
- ⊕ 8mm steel baffle plate
- ⊕ 10 Year firebox warranty
- ⊕ Dual-action handle latch
- ⊕ Dual pre-heated primary air
- ⊕ 1200mm bench option

		
Capacity 420m²	Log Width 530mm	Flue Size 175mm
Efficiency 62%†	Emissions 1.2g/kg	Output 25+kW‡



Jewel 400 (Insert)


- ⊕ 2x 3-speed fans with thermostatic switch
- ⊕ Cast iron lined
- ⊕ 8mm steel baffle plate
- ⊕ 10 Year firebox warranty
- ⊕ Dual-action handle latch
- ⊕ Dual pre-heated primary air
- ⊕ Masonry installation only

		
Capacity 400m ²	Log Width 530mm	Flue Size 175mm
Efficiency 62%†	Emissions 1.2g/kg	Output 25+kW‡

Zero Clearance Installation

Don't have a brick chimney, but love the sleek look of a Eureka Insert? All of the Eureka Inserts (exc. double sided range) are Zero Clearance Install compatible using the relevant Eureka Zero Clearance Cabinet. This allows for a broader range of ways to incorporate a Eureka Insert heater into your living space.

Step 1

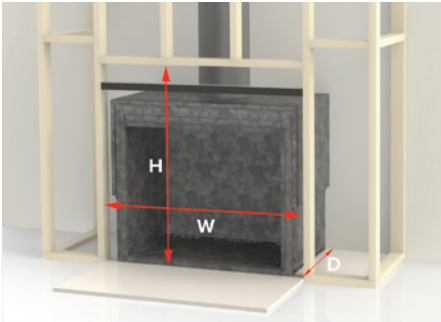

Step 2



Step 3



Minimum Zero Clearance Framing Dimensions			
Model	H	W	D
Opal, Stockade	810	916	565
Victorian	1063	1036	595
Garnet	868	1035	570
Pearl	1000	915	635
Ruby	1000	1055	610

Specifications detail minimum framework opening (inclusive of clearance from Zero Box to combustible framework)

A Zero Clearance Cabinet allows for safe installation into timber framework with minimal clearances to the unit. Once your framework is built, it is as simple as cladding the front face with a cement sheet or equivalent, and your Eureka Insert heater is safely installed as a focal point to your room.


Minimum framing dimensions are an indicative guide only. **DO NOT** begin any construction prior to consulting the full Zero Clearance Installation guide for the relevant unit. Full Installation instructions available at www.eurekaheating.com.au

Elevated Insert Installations

Raising your Eureka Insert installation above floor level? You may be able to reduce your minimum hearth depth to 300mm. Refer to the following table as a guide on how high your unit must be raised to achieve the reduced hearth depth.



	REF	OPAL		STOCKADE		GARNET		PEARL		RUBY	
Hearth width	X	890mm (min.)		950mm (min.)		1035mm (min.)		945mm (min.)		1000mm (min.)	
Hearth raised	Y	0mm	155mm (min.)	0mm	132mm (min.)	0mm	197mm (min.)	0mm	175mm (min.)	0mm	140mm (min.)
Hearth depth from front of fascia	Z	530mm (min.)	300mm (min.)	510mm (min.)	300mm (min.)	610mm (min.)	300mm (min.)	530mm (min.)	300mm (min.)	530mm (min.)	300mm (min.)

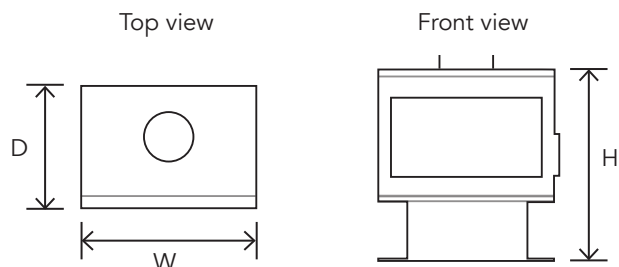


Freestanding Specifications

Dimensions & clearances	Flue type	Overall dimensions width/height/depth			Back of Woodheater to Flue Centre	Clearance to Combustibles			Minimum hearth size width/depth/thickness			
		W	H	D		Rear	Side	Corner	W	D	T	mm in front of unit
Freestanding models	Solid / perforated				mm							
Jade	Perforated	585	680	434	173	250*	725	425 / 350**	780	930	18	500
Jade	Half Shield	585	680	434	173	250	725	450 / 350**	780	930	18	500
Amber	Perforated	640	730	502	176	250*	750	500 / 350**	820	1060	24	550
Amber	Half Shield	640	730	502	176	300	825	475 / 300**	820	1060	24	550
Jasper	Perforated	675	770	557	196	200*	825	550 / 425**	820	1140	30	600
Jasper	Half Shield	675	770	557	196	350	900	575 / 475**	820	1140	30	600
Opal	Perforated	650	800	508	180	125*	325	150*	890	960	12	400
Miner	Perforated	710	937	570	180	150*	400	175*	950	1050	18	400
Garnet	Perforated	782	1008	570	180	150*	450	200*	1020	1100	20	450
Emerald	Perforated	655	745	610	170	150	450	125	900	1070	4.5	300
Onyx	Perforated	775	795	595	165	100	330	50	1170	1020	4	300
Solitaire	Perforated	850	825	620	180	100*	425	100*	960	1075	6	450
Nugget	Perforated	610	710	650	175	50	550	170	770	910	9	300
Pearl	Solid/Perforated	690	765	548	205	155/50*	325	50/75*	945	1000/895	9	300
Ruby	Solid/Perforated	748	828	548	205	50*	325	50*	1000	895	9	300
Jewel	Solid/Perforated	695	765	745	N/A	N/A	330	N/A	940	1590	6	460

* Standard flue shield kit must be installed to achieve minimum rear wall clearance (included in woodheaters, excluding Jade, Amber and Jasper)


** Requires additional side wing heat shields to achieve minimum corner clearance (purchased separately)

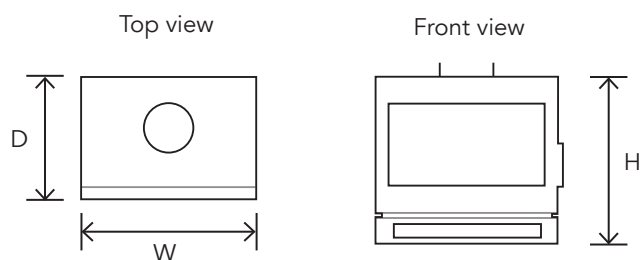

Modular Specifications

Dimensions & clearances	Flue type	Overall dimensions width/height/depth			Back of Woodheater to Flue Centre	Clearance to Combustibles			Minimum hearth size width/depth/thickness			
		W	H	D		Rear	Side	Corner	W	D	T	mm in front of unit
Modular models	Solid / perforated				mm							
Pearl	Sol. / Perf.	690	635	548	205	155/50*	325	50/75*	945	1005/900	140	330
Ruby	Sol. / Perf.	748	676	548	205	50*	325	50*	1000	895	140	330
Jewel	Sol. / Perf.	695	653	745	N/A	N/A	475	N/A	940	1890	32	570
Pearl w/ Bench	Sol. / Perf.	690	635	548	205	155/50*	325	50/75*	945	1005/900	9	330
Ruby w/ Bench	Sol. / Perf.	748	676	548	205	50*	325	50*	1000	895	9	330
Jewel w/ Bench	Sol. / Perf.	695	653	745	N/A	N/A	475	N/A	940	1375	6	330
Pearl/Ruby Bench	—	1200	280	550	—	—	—	—	—	—	—	—
Jewel Bench	—	1200	280	775	—	—	—	—	—	—	—	—

* Standard flue shield kit must be installed to achieve rear wall clearance (included in woodheater)

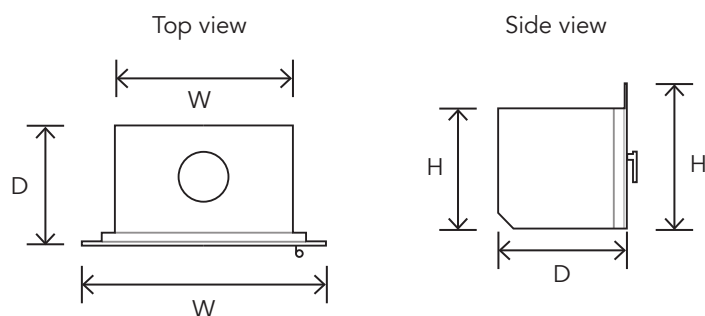

Insert Specifications

Dimensions & clearances	Overall dimensions width/height/depth			Rear casing dimensions			Clearance to combustibles — from base of appliance			Minimum hearth size				Back of fascia to flue centre
										Masonry installation			ZCC install	
Insert Models	W	H	Fascia Depth	W	H	D	Side	To Mantle Shelf	To Breast Plate	W	D	T	mm in front of ZCB***	mm
Opal	882	750	42	570	595	365	50	1100	1040	890	530*	12	570*	232
Stockade	922	758	42	631	635	430	50	1390	1340	950	510*	12	550*	296
Garnet	994	828	42	700	706	430	50	1545	1545	1035	610*	18	650*	295
Victorian	1028	730	60	665	630	475	150	1225	975	1000	600*	18	660*	300
Pearl Masonry	855	640	16	751	595	484	55	1500**	1410	945	550*	18	550*	326
Pearl ZC	850	674	3	Refer to ZC Install Guide			55	1500**	1410	945	N/A	18	550*	N/A
Ruby Masonry	935	705	16	808	651	484	35	1500**	1410	1000	520*	18	520*	326
Ruby ZC	930	736	3	Refer to ZC Install Guide			35	1500**	1410	1000	N/A	18	520*	N/A
Jewel	875	692	16	751	644	708	205	1127	1127	940	1890*	32	570*	354

* Minimum hearth depth in front of unit can be reduced by raising the appliance above combustible materials (Consult your local dealer and/or page 22 of this brochure)

** Mantle deflector required to achieve mantle clearance (included with woodheater)

*** Hearth must also be installed beneath ZCC - refer to install guide for exact specifications

Notes: ‡ All KW Outputs quoted are Peak Power. † All Efficiencies quoted are Peak Efficiency %. All dimensions are in mm. Dimensions and clearances shown are for reference only. Refer to the Owner's Manual for exact specifications prior to installation.

All information in this brochure was correct at the time of printing, July 2021, however Eureka Woodheating reserves the right to change specifications without notice. Colours shown are as close as printing method allow. Installation should be carried out by a qualified installer.

All fireplace inserts must be installed into a masonry chimney or Eureka Zero Clearance Cabinet, and be fully flued.

Your local Eureka dealer



AF Gason Pty Ltd
Phone: 03 9763 2700
Fax: 03 9763 0836
heating@gason.com.au

www.eurekaheating.com.au