


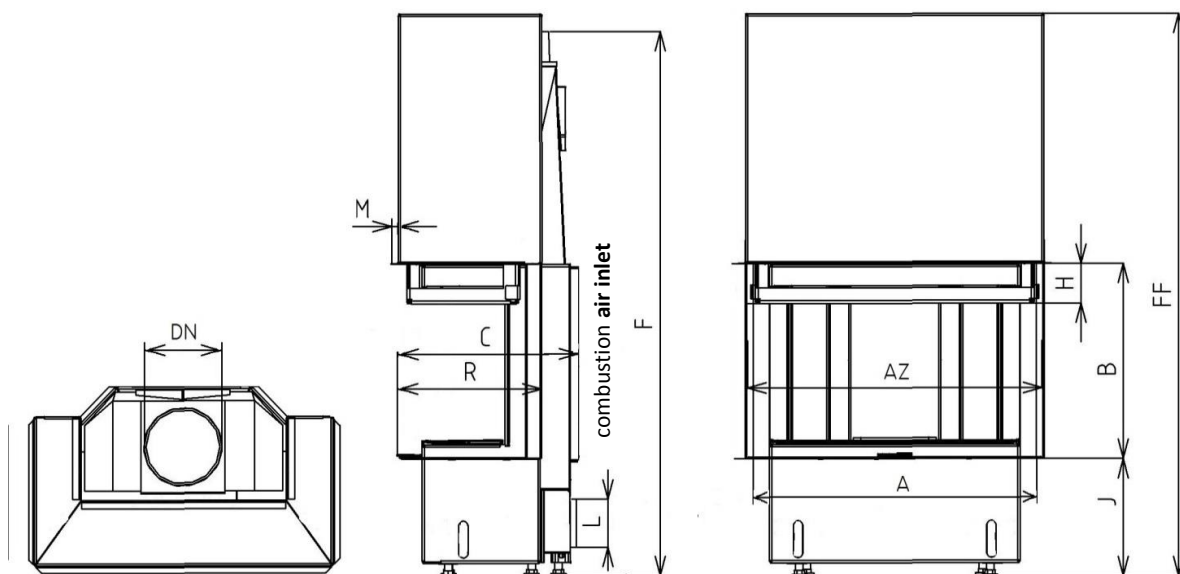



Technical parameters			
1	Nominal heat output	kW	10
2	Pressure required	Pa	12
3	Average efficiency	%	
4	Average flue gas temperature	°C	
5	Wood consuption	kg/h	3,2
6	Consumption of combustion air	m ³ /hod	30
7	Emission of CO to 13% O ₂	%	
8	Flue gas mass flow	g/s	
9	Weight	kg	
10	Required min. cross section for circulating air - INPUT	cm ²	300
11	Required min. cross section for circulating air - OUTPUT	cm ²	500
12	Three-component insulated chimney - active height 5 m	Ø cm	180
13	character of building construction with fireplace insert	warm air convection	yes
		heat storage without conv.	yes

Optional accessories:

Cover frame (KR)
 Double glass (DS)
 Double glass Modern(DSM)
 Black printed glass(SM)
 External ashtray(VOP)
 Seg. chamotte lining (SO)
 vermiculite lining (VO)
 Lower hearth (ZO)

Sizes			CHOPOK 2R90 67 VD 695/450- S/380	CHOPOK 2R90 67 VD 695/510- S/380	CHOPOK 2R90 67 VD 695/570- S/380
1	A	mm	680		
2	F	mm	1350	1410	1470
3	C	mm	500		
4	DN	Ø mm	180		
5	B	mm	450	510	570
6	FF	mm	1350	1470	1590
7	R	mm	380		
8	AZ	mm	695		
9	H	mm	75		
10	J	mm	325 + /160/		
11	K	Ø mm			
12	L	Ø mm	125		
13	M	mm	20		
14	N	mm			

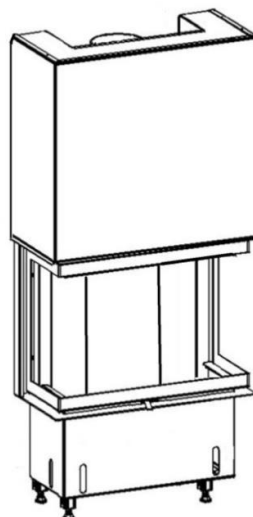

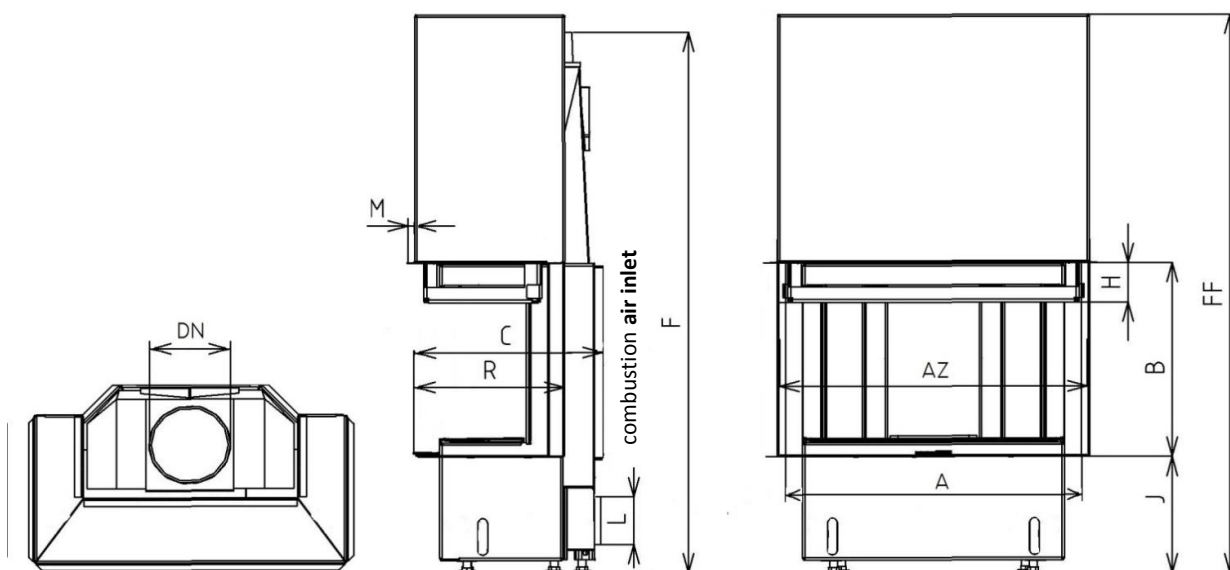



Technical parameters			
1	Nominal heat output	kW	10,5
2	Pressure required	Pa	12
3	Average efficiency	%	
4	Average flue gas temperature	°C	
5	Wood consuption	kg/h	3,3
6	Consumption of combustion air	m ³ /hod	31,5
7	Emission of CO to 13% O ₂	%	
8	Flue gas mass flow	g/s	
9	Weight	kg	
10	Required min. cross section for circulating air - INPUT	cm ²	325
11	Required min. cross section for circulating air - OUTPUT	cm ²	525
12	Three-component insulated chimney - active height 5 m	Ø cm	180
13	character of building construction with fireplace insert	warm air convection	yes
		heat storage without conv.	yes

Optional accessories:

Cover frame (KR)
 Double glass (DS)
 Double glass Modern(DSM)
 Black printed glass(SM)
 External ashtray(VOP)
 Seg. chamotte lining (SO)
 vermiculite lining (VO)
 Lower hearth (ZO)

Sizes			CHOPOK 2R90 73 VD 755/450- S/380	CHOPOK 2R90 73 VD 755/510- S/380	CHOPOK 2R90 73 VD 755/570- S/380
1	A	mm	740		
2	F	mm	1350	1410	1470
3	C	mm	500		
4	DN	Ø mm	180		
5	B	mm	450	510	570
6	FF	mm	1350	1470	1590
7	R	mm	380		
8	AZ	mm	755		
9	H	mm	75		
10	J	mm	325 + /160/		
11	K	Ø mm			
12	L	Ø mm	125		
13	M	mm	20		
14	N	mm			

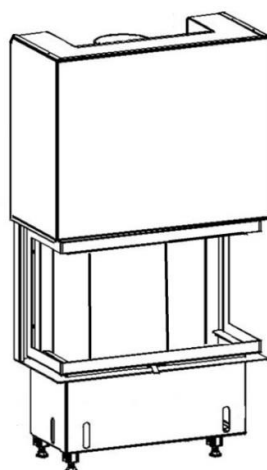

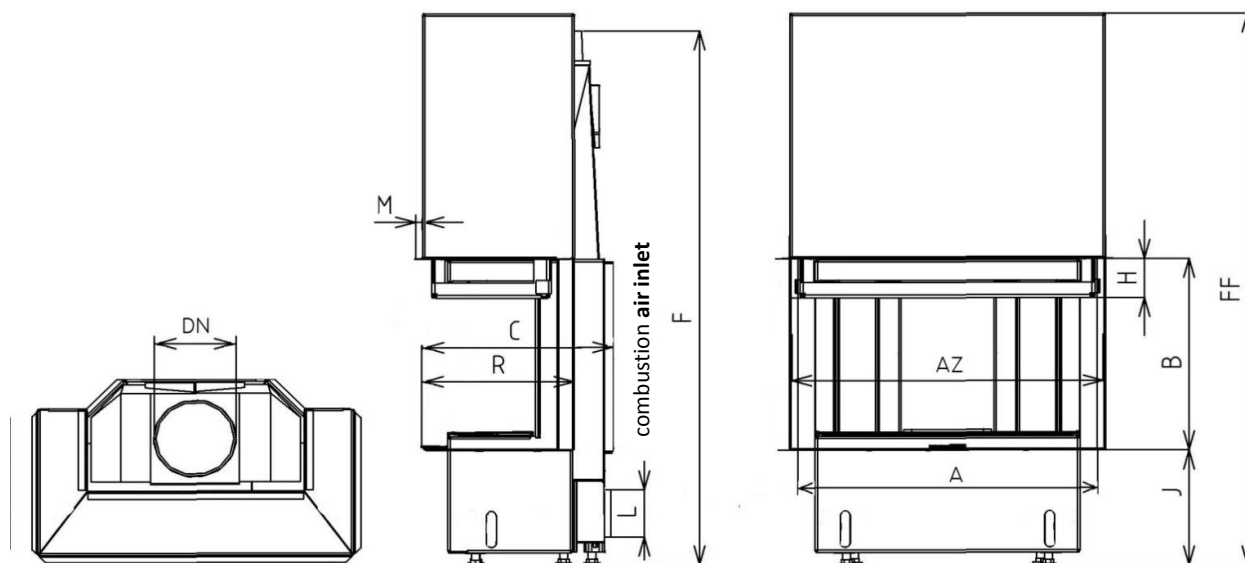



Technical parameters			
1	Nominal heat output	kW	11
2	Pressure required	Pa	12
3	Average efficiency	%	
4	Average flue gas temperature	°C	
5	Wood consuption	kg/h	3,5
6	Consumption of combustion air	m ³ /hod	33
7	Emission of CO to 13% O ₂	%	
8	Flue gas mass flow	g/s	
9	Weight	kg	
10	Required min. cross section for circulating air - INPUT	cm ²	350
11	Required min. cross section for circulating air - OUTPUT	cm ²	550
12	Komín trojvrstvový účinná výška 6 m	Ø cm	180
13	character of building construction with fireplace insert	warm air convection	yes
		heat storage without conv.	yes

Optional accessories:

Cover frame (KR)
 Double glass (DS)
 Double glass Modern(DSM)
 Black printed glass(SM)
 External ashtray(VOP)
 Seg. chamotte lining (SO)
 vermiculite lining (VO)
 Lower hearth (ZO)

Sizes			CHOPOK 2R90 78 VD 805/450- S/380	CHOPOK 2R90 78 VD 805/510- S/380	CHOPOK 2R90 78 VD 805/570- S/380
1	A	mm	790		
2	F	mm	1350	1410	1470
3	C	mm	500		
4	DN	Ø mm	200		
5	B	mm	450	510	570
6	FF	mm	1350	1470	1590
7	R	mm	380		
8	AZ	mm	805		
9	H	mm	75		
10	J	mm	325 + /160/		
11	K	Ø mm			
12	L	Ø mm	125		
13	M	mm	20		
14	N	mm			

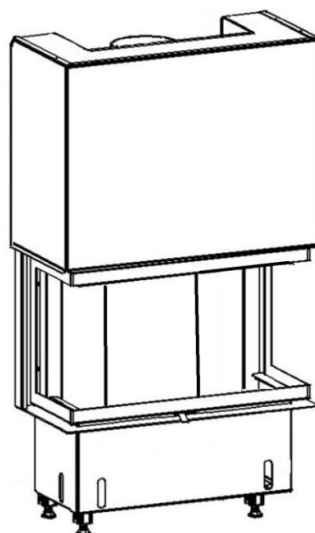

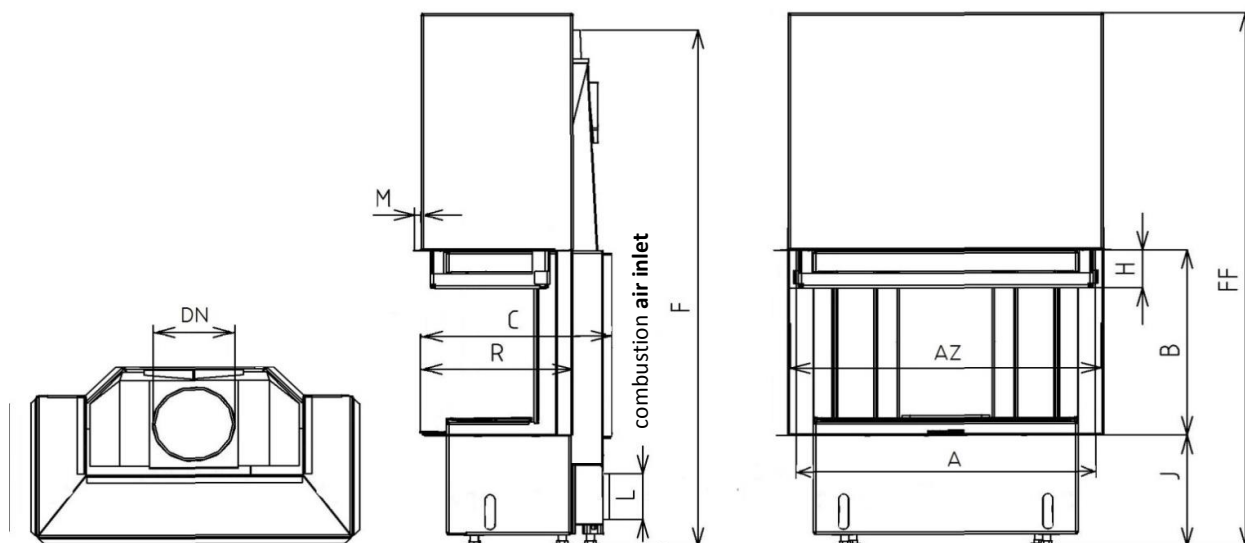CHOPOK 2R90 90 VD 925/450,510,570-S/380


Technical parameters			
1	Nominal heat output	kW	12
2	Pressure required	Pa	12
3	Average efficiency	%	
4	Average flue gas temperature	°C	
5	Wood consuption	kg/h	3,9
6	Consumption of combustion air	m ³ /hod	36
7	Emission of CO to 13% O ₂	%	
8	Flue gas mass flow	g/s	
9	Weight	kg	
10	Required min. cross section for circulating air - INPUT	cm ²	375
11	Required min. cross section for circulating air - OUTPUT	cm ²	600
12	Three-component insulated chimney - active height 5 m	Ø cm	200
13	character of building construction with fireplace insert	warm air convection	yes
		heat storage without conv.	yes

Optional accessories:

Cover frame (KR)
 Double glass (DS)
 Double glass Modern(DSM)
 Black printed glass(SM)
 External ashtray(VOP)
 Seg. chamotte lining (SO)
 vermiculite lining (VO)
 Lower hearth (ZO)

Sizes			CHOPOK 2R90 90 VD 925/450- S/380	CHOPOK 2R90 90 VD 925/510- S/380	CHOPOK 2R90 90 VD 925/570- S/380
1	A	mm	910		
2	F	mm	1350	1410	1470
3	C	mm	500		
4	DN	Ø mm	200		
5	B	mm	450	510	570
6	FF	mm	1350	1470	1590
7	R	mm	380		
8	AZ	mm	925		
9	H	mm	75		
10	J	mm	325 + /160/		
11	K	Ø mm			
12	L	Ø mm	125		
13	M	mm	20		
14	N	mm			

